

European Rail Rent

Data Sheet

Page 1 / 2

Flat wagon Snps7



General

Load limits

	A	B	C	D	
S	38,3	46,3	56,3	64,3	★★★
120	0,00				

Ca. 25.7 t

Tare

75 m

R_{min}

TEN GE / G1

Gauge

22.5 t

Axle load

2°30'

Ramp angle

22,860 mm

Length over buffer

21,620 mm

Loading length

2,640 mm

Loading width

2,050 mm

Stanchion height

57.07 m²

Loading area

Running gear

Y25Ls □(K) 1xBGU H V

Bogie

920 mm

Wheel diameter

25 t

Wheel set type

BA 386

Axle box type

Coil spring

Suspension

Brake

KE-GP-A (K)

Type

1Bgu, C810

Brake pads

autom. max. 59 t

Load braking

100%, operated from ground

Handbrake

100 l

Air reservoir

Draw gear and buffer

Kat. A / 105 mm

Buffer

340 x 550 mm

Buffer plate dimension

1,500 kN

Draw gear

1,350 kN

Screw coupling

Equipment

24 exchangeable stanchions incl. fixed cross-piece (100 mm high), 9 winch system, 44 Fixing rings (18 on each frame sides and 4 on each head stock), 7 help loading threshold incl. both sides gripper deflector - ca. 98 mm high, 2 hinged shunter's handrail, Floor: 5 mm tear sheet
GPS-Module

Remarks

TSI authorisation

Load goods

Wood



ERR European Rail Rent GmbH

Schifferstr. 196
47059 Duisburg

Tel.: +49 (0)203 9355 56 -0
Fax: +49 (0)203 9355 56 -11

info@railrent.com
www.railrent.com

European Rail Rent

Data Sheet


Page 2 / 2

Flat wagon

Snps7



Appendix to data sheet

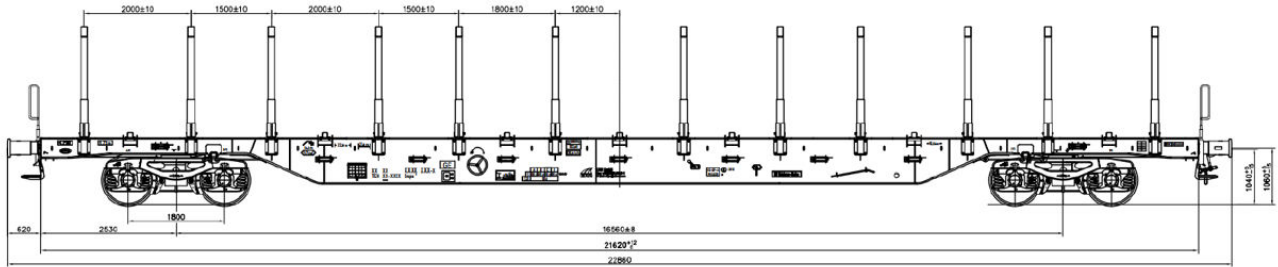

ERR European Rail Rent GmbH

Schifferstr. 196
47059 Duisburg

Tel.: +49 (0)203 9355 56 -0
Fax: +49 (0)203 9355 56 -11

info@railrent.com
www.railrent.com

Date of issue: 11/2022

Technical changes reserved